

Glideline

GLS SERVING WINDOW



Architectural Glazing Systems



Specification



CONFIGURATIONS

- GAS
- SLIDING
- BIFOLD

SASH SIGHTLINES

- **GAS** - 49MM SASH
- **SLIDING** - 15MM
- **BIFOLD** - 110MM

GLAZING

MAX. 48 MM, MIN. 25 MM

MAXIMUM SASH DIMENSIONS

- **GAS** - WIDTH (L) 1800MM, HEIGHT (H) 1500MM
- **SLIDING** - WIDTH (L) 2500MM, HEIGHT (H) 1800MM
- **BIFOLD** - WIDTH (L) 1200MM, HEIGHT (H) 1800MM

MAXIMUM SASH WEIGHT

GAS - 70 KG / SLIDING - 320 KG / BIFOLD - 120KG


COLOUR

POWDER COATING RAL FINISH
STANDARD 7016M, 9005M, 9016G
AVAILABLE IN 150+ RAL FINISHES
TEXTURED FINISH AVAILABLE
SPLIT COLOR FOR INTERIOR/EXTERIOR
WOOD EFFECT POWDER COATING
ANODIZED ALUMINIUM

U VALUE (W/M2K) >

SOLAR HEAT REFLECTION >



LIGHT TRANSMISSION >



FEATURES		
Transmittance		$U_w \geq 1.2$ (W/m ² K)
Acoustic insulation		Rw up to 41 dB
Air permeability		Class 4
Water tightness		Class E750
Wind resistance		Class C3

BFRC Rating


kWh/(m² .yr)

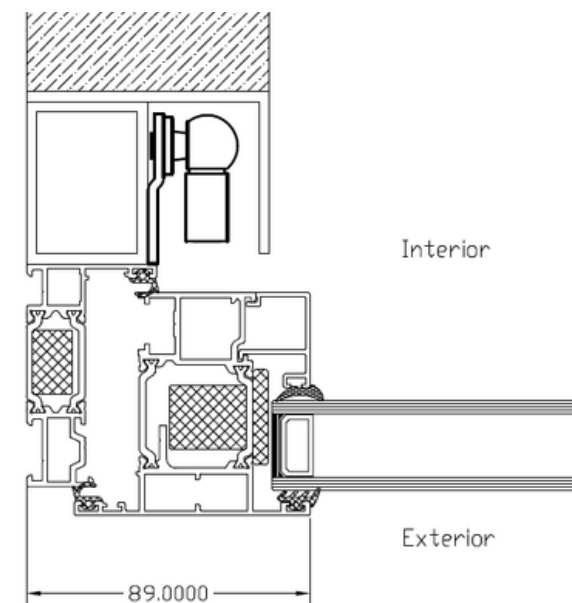


Configurations




GAS

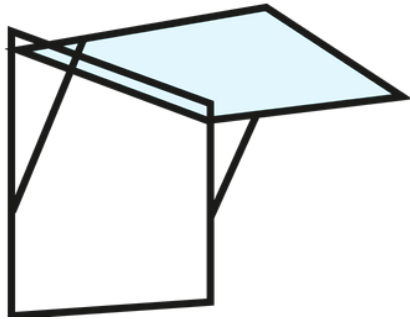

SLIDING

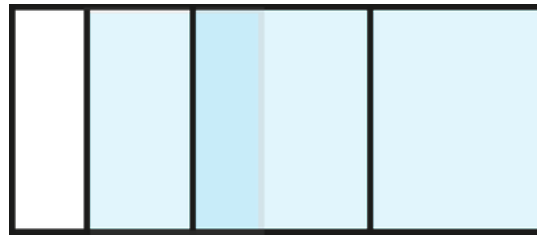

BIFOLD

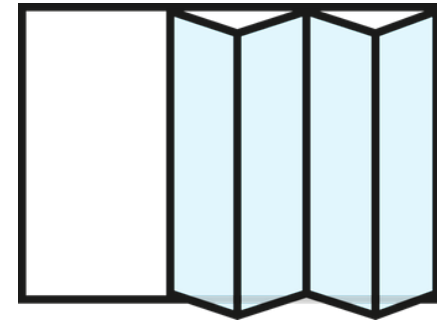


Colours



Black 9005 Matt



Anthracite Grey 7016 Matt



White 9016 Gloss



Custom RAL



Textured



Anodized





Glideline