

GLIDELINE

GS15 MINIMAL





SPECIFICATION



CONFIGURATIONS

2 TRACK, 3 TRACK, QUAD TRACK

SIGHTLINES

INTERLOCK 15 MM

GLAZING

MAX. 30 MM, MIN. 26 MM DOUBLE GLAZED

MAXIMUM SASH DIMENSIONS

WIDTH (L) 2000 MM, HEIGHT (H) 2500 MM

MAXIMUM SASH WEIGHT

300 KG

COLOUR

POWDER COATING RAL FINISH
STANDARD 7016M, 9005M, 9016G
AVAILABLE IN 150+ RAL FINISHES
TEXTURED FINISH AVAILABLE
SPLIT COLOR FOR INTERIOR/EXTERIOR
WOOD EFFECT POWDER COATING
ANODIZED ALUMINIUM


BFRC Rating

kWh/(m².yr)

| | |
|-------------|------|
| ≥20 | A ++ |
| >10 to 20 | A + |
| 0 to <10 | A ✓ |
| -10 to <0 | B |
| -20 to <-10 | C |
| -30 to <-20 | D |
| -50 to <-30 | E |

FEATURES


| | | |
|---------------------|--|-------------------------------------|
| Transmittance | | $U_w \geq 1.2$ (W/m ² K) |
| Acoustic insulation | | R _w up to 41 dB |
| Air permeability | | Class 4 |
| Water tightness | | Class 7A |
| Wind resistance | | Class C5 |

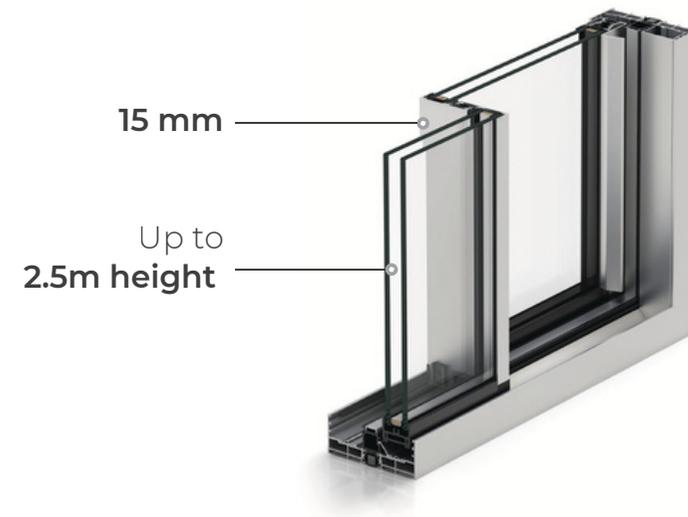


CONFIGURATIONS




2 PANE




3 PANE

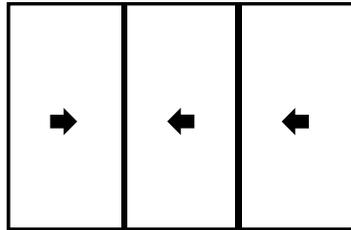


4 PANE

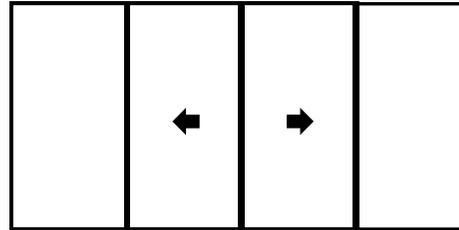


QUAD TRACK

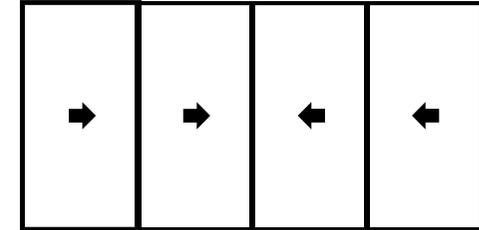


1 PANE POCKET




2 PANE POCKET

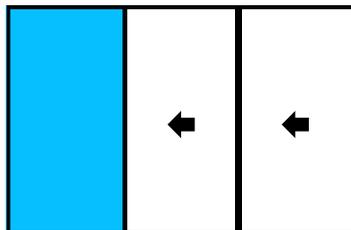


2 PANE POCKET

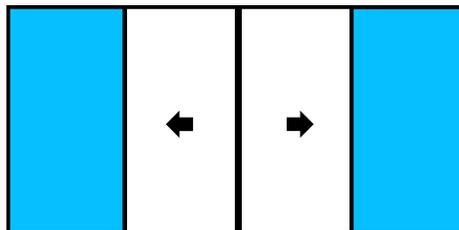


3 PANE POCKET

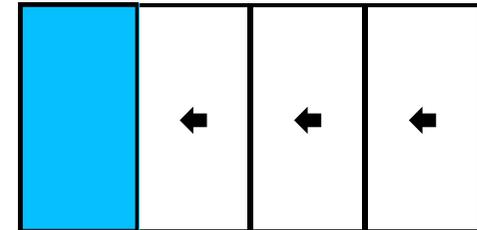

CORNER DOOR
MOVABLE CORNER POST OR
FRAMELESS BONDED CORNER

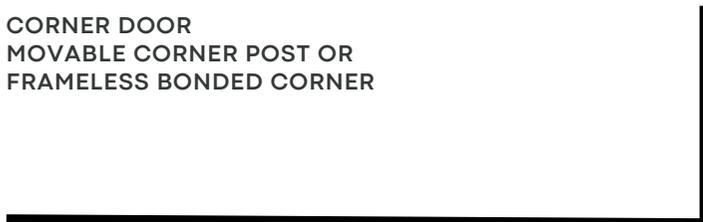

U SHAPE DOOR
MOVABLE CORNER POST OR
FRAMELESS BONDED CORNER

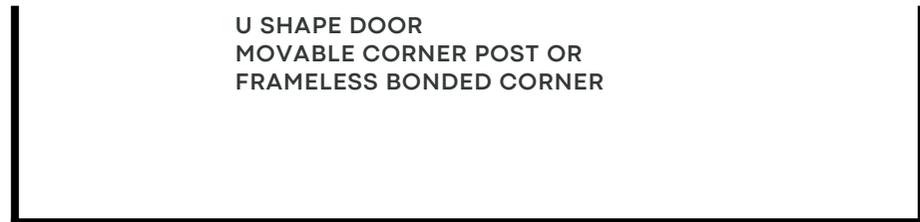

CONFIGURATIONS



**15MM EQUAL
SIGHTLINES**

1.2 U VALUE

**UP TO 4
TRACKS**

**INTEGRATED
DRAINAGE**

**FLUSH
STACKING**

**ADJUSTABLE
WHEELS**


**HIDDEN
HANDLE**

**HIDDEN
TRACK**


CONFIGURATIONS



HIDDEN TRACK SOLUTION

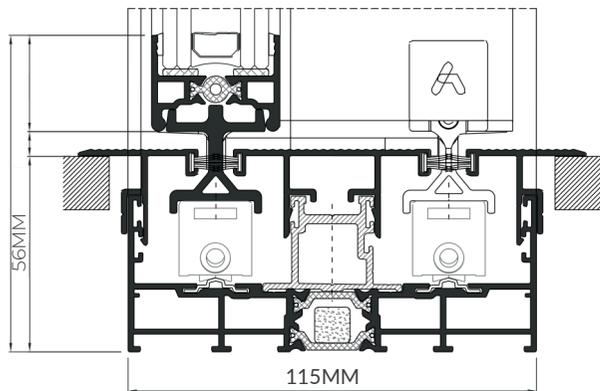


BESPOKE DRAINAGE SOLUTION

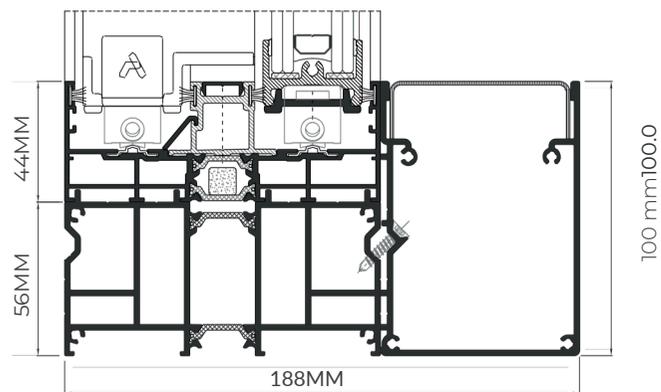

HIDDEN TRACK SOLUTION

POCKET DOORS

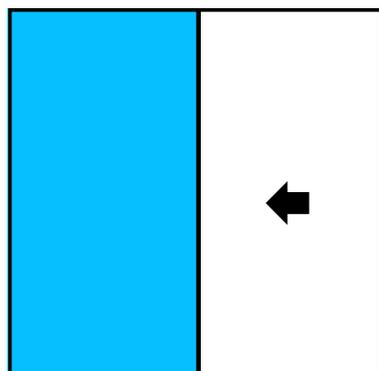

2.5M MAX HEIGHT



GLAZING



| Height (m) | 1.0 m width | 1.5 m width | 2.0 m width |
|------------|-------------|-------------|-------------|
| 2.1m high | 6 mm | 6 mm | 8 mm |
| 2.2m high | 6 mm | 6 mm | 8 mm |
| 2.3m high | 8 mm | 8 mm | 8 mm |
| 2.4m high | 8 mm | 8 mm | 8 mm |
| 2.5m high | 8 mm | 8 mm | 8 mm |



15MM

15MM

15MM

15MM



GS15 HIDDEN HANDLE

Discreet. Secure. Designed to blend seamlessly with the frame.

The GS15 hidden handle has been engineered to provide maximum security without compromising on aesthetics. Its minimal profile ensures the glazing remains the hero, while the hardware quietly does the work behind the scenes.

Key Features:

- Secure multipoint locking system – smooth, reliable operation with a simple up-and-down handle movement.
- Minimalist design – handle sits discreetly within the sash profile, maintaining slim 15mm sightlines.
- Lockable – key lock for child safe protection.
- Durability built in – manufactured from high-quality components for long-term performance.
- Effortless operation – ergonomic movement ensures the handle is easy to use while maintaining security.
- Architectural appeal – ideal for modern, high-end projects where subtle detailing is just as important as performance.



FLUSH TRICKLE VENTS

Discreetly built into the sash, Glideline's flush trickle vents provide continuous background ventilation without disrupting the system's clean, minimal design. The vent sits completely flush to the profile, maintaining sleek sightlines.

Precision-engineered for quiet, efficient airflow, it delivers year-round comfort with seamless Glideline detailing.





GLIDELINE