

GLIDELINE

GS25 FRAMELESS





SPECIFICATION



CONFIGURATIONS

2 TRACK (160 MM), 3 TRACK (248 MM), QUAD TRACK

SIGHTLINES

TOP/BOTTOM - 0 MM
LEFT/RIGHT - 0 MM
INTERLOCK 25 MM

GLAZING

MAX. 44 MM, MIN. 28 MM

MAXIMUM SASH DIMENSIONS

WIDTH (L) 3500 MM, HEIGHT (H) 3500 MM

MAXIMUM SASH WEIGHT

500 KG

COLOUR

POWDER COATING RAL FINISH
STANDARD 7016M, 9005M, 9016G
AVAILABLE IN 150+ RAL FINISHES
TEXTURED FINISH AVAILABLE
SPLIT COLOR FOR INTERIOR/EXTERIOR
WOOD EFFECT POWDER COATING
ANODIZED ALUMINIUM

BFRC Rating

kWh/(m²·yr)

≥20	A ++
>10 to 20	A +
0 to <10	A ✓
-10 to <0	B
-20 to <-10	C
-30 to <-20	D
-50 to <-30	E

FEATURES


Transmittance		$U_w \geq 0.88$ (W/m ² K)
Acoustic insulation		Rw up to 43 dB
Air permeability		Class 4
Water tightness		Class E900
Wind resistance		Class C5




CONFIGURATIONS




2 PANE




3 PANE

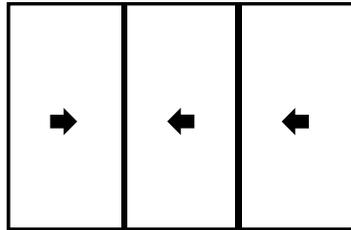


4 PANE

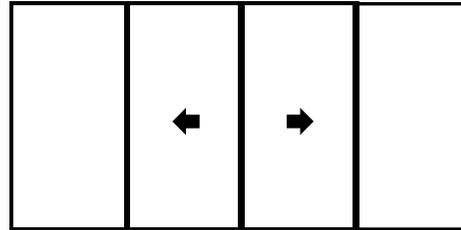


QUAD TRACK

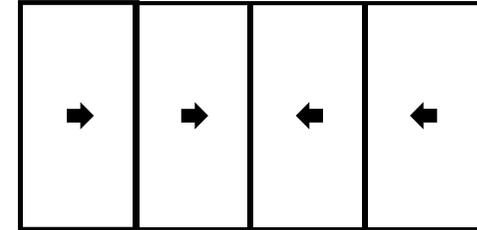


1 PANE POCKET




2 PANE POCKET

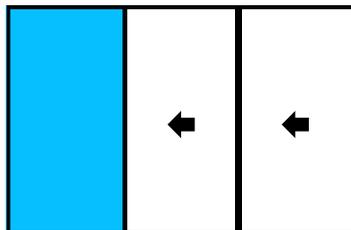


2 PANE POCKET

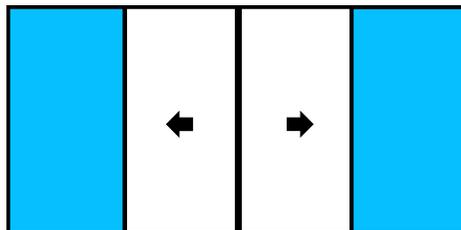


3 PANE POCKET

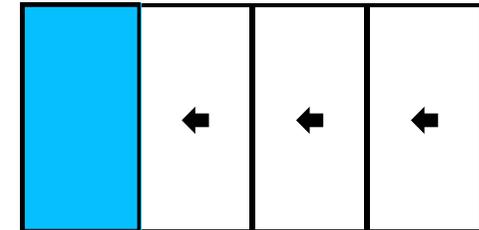

CORNER DOOR
MOVABLE CORNER POST OR
FRAMELESS BONDED CORNER

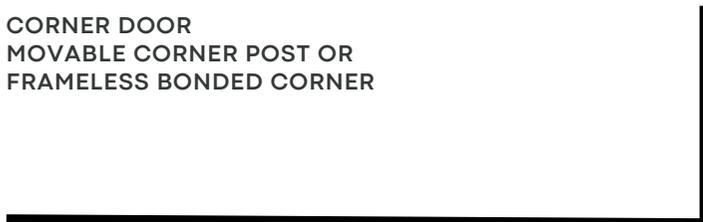


U SHAPE DOOR
MOVABLE CORNER POST OR
FRAMELESS BONDED CORNER

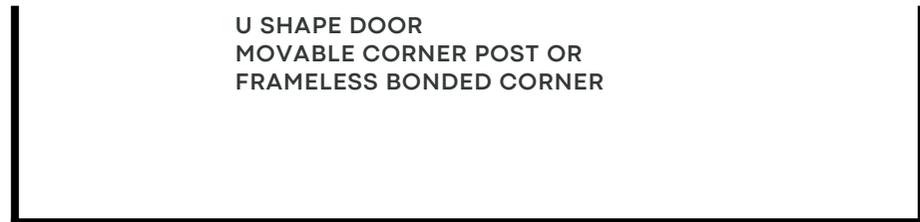


CONFIGURATIONS




DOUBLE TRACK

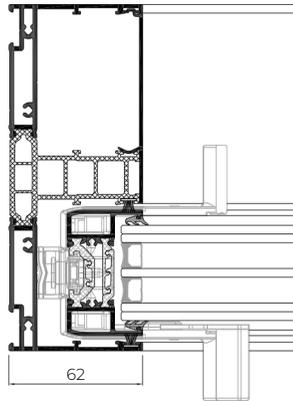


BESPOKE DRAINAGE SOLUTION

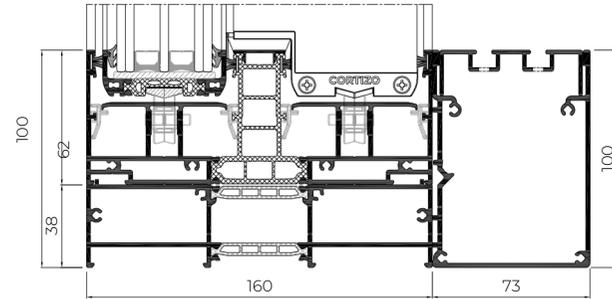


INTERLOCK

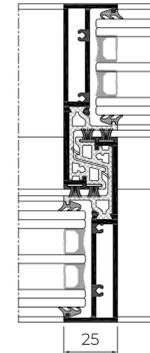


REINFORCED INTERLOCK

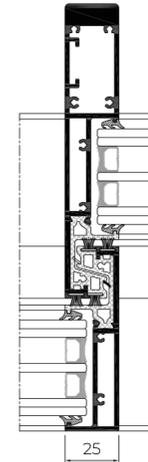

INTERLOCK HANDLE

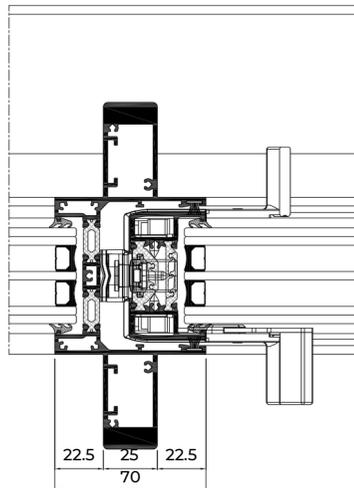

CORNER OPENING

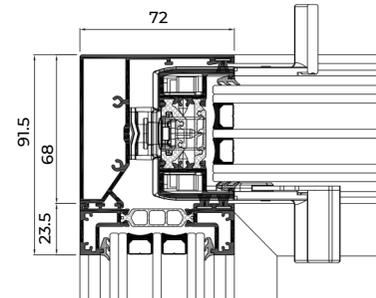

NEW HANDLE







NEW HANDLE

The lock is conceived to achieve total concealment of the sashes behind the frame, activating the opening and closing manoeuvre with a smooth semicircular turn.

- Concealed design
- Secure locking
- Smooth 90° action
- Available in multiple finishes

A slim, concealed handle engineered for smooth 90° operation, secure locking, and seamless integration into any frame design.

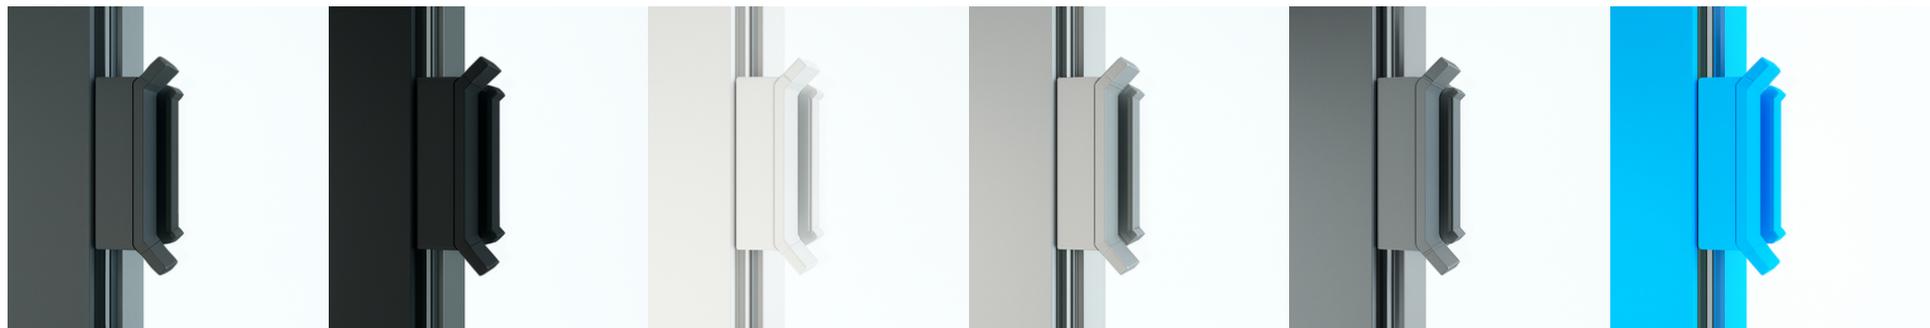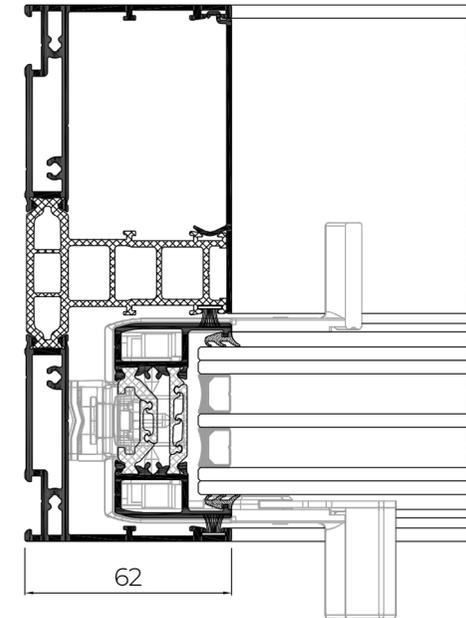

GREY 7016

BLACK 9005

WHITE 9016

LIGHT SLIVER

DARK SLIVER

CUSTOM RAL

GLAZING



Height (m)	1.0 m width	1.5 m width	2.0 m width	2.5 m width	3.0 m width	3.5 m width
2.1 m high	6 mm	6 mm	6 mm	8 mm	8 mm	8 mm
2.2 m high	6 mm	6 mm	6 mm	8 mm	8 mm	10 mm
2.3 m high	6 mm	6 mm	6 mm	8 mm	8 mm	10 mm
2.4 m high	6 mm	6 mm	8 mm	8 mm	8 mm	10 mm
2.5 m high	6 mm	6 mm	8 mm	8 mm	8 mm	10 mm
2.6 m high	6 mm	6 mm	8 mm	8 mm	10 mm	10 mm
2.7 m high	6 mm	6 mm	8 mm	8 mm	10 mm	10 mm
2.8 m high	6 mm	6 mm	8 mm	8 mm	10 mm	10 mm
2.9 m high	6 mm	6 mm	8 mm	8 mm	10 mm	10 mm
3.0 m high	6 mm	6 mm	8 mm	8 mm	10 mm	10 mm
3.1 m high	8 mm	8 mm	8 mm	10 mm	10 mm	10 mm
3.2 m high	8 mm	8 mm	8 mm	10 mm	10 mm	10 mm
3.3 m high	8 mm	8 mm	8 mm	10 mm	10 mm	10 mm
3.4 m high	8 mm	8 mm	8 mm	10 mm	10 mm	10 mm
3.5 m high	8 mm	8 mm	8 mm	10 mm	10 mm	10 mm





GLIDELINE