



# GLIDELINE

GS25 SLIDING DOOR





# SPECIFICATION



## CONFIGURATIONS

MONO TRACK, 2 TRACK, 3 TRACK, QUAD TRACK

## SIGHTLINES

INTERLOCK 25 MM

## GLAZING

MAX. 56 MM, MIN. 36 MM

## MAXIMUM SASH DIMENSIONS

WIDTH (L) 4000 MM, HEIGHT (H) 4000 MM

## MAXIMUM SASH WEIGHT

400 KG MANUAL, 700 KG MOTORIZED

## COLOUR

POWDER COATING RAL FINISH  
STANDARD 7016M, 9005M, 9016G  
AVAILABLE IN 150+ RAL FINISHES  
TEXTURED FINISH AVAILABLE  
SPLIT COLOR FOR INTERIOR/EXTERIOR  
WOOD EFFECT POWDER COATING  
ANODIZED ALUMINIUM

### BFRC Rating

kWh/(m<sup>2</sup>.yr)

≥20	A	++
>10 to 20	A	+
0 to <10	A	
-10 to <0	B	
-20 to <-10	C	✓
-30 to <-20	D	
-50 to <-30	E	

Double glazing

### BFRC Rating

kWh/(m<sup>2</sup>.yr)

≥20	A	++
>10 to 20	A	+
0 to <10	A	✓
-10 to <0	B	
-20 to <-10	C	
-30 to <-20	D	
-50 to <-30	E	

Triple glazing

## FEATURES

U value		Double glazing Uw from 1.3 (W/m <sup>2</sup> K)	Triple glazing Uw ≥ 0.9 (W/m <sup>2</sup> K)
Acoustic insulation		Rw up to 43 dB	
Air permeability		Class 4	
Water tightness		Class 7A* / 9A**	
Wind resistance		Class C3* / C4**	

Double glazing Ug=1.0 / Triple glazing Ug=0.5

Wind resistance:

\* Reference test balcony 4.00 x 3.00 m / 2 sashes


\*\*Reference test balcony 4.00 x 3.00 m / 1 sash + 1 fixed light



INTERLOCK HANDLE



SECURITY  
HARDWARE

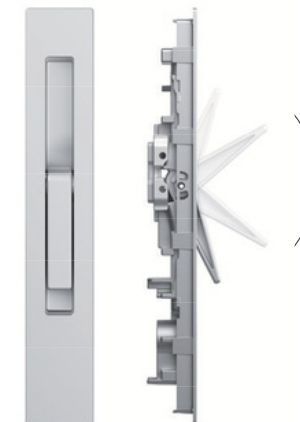


FLUSH SECURITY  
HARDWARE


# CONFIGURATIONS




2 PANE




3 PANE

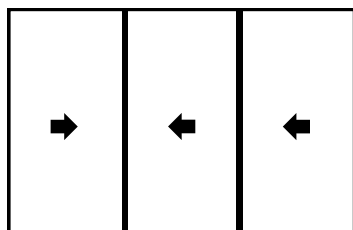


4 PANE

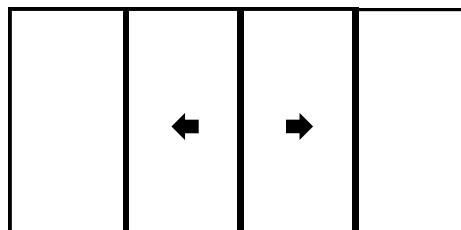


QUAD TRACK

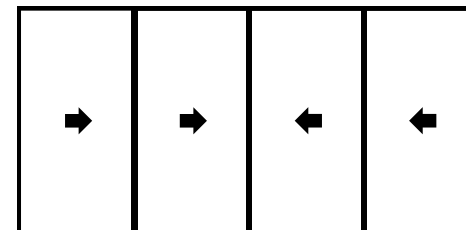


1 PANE POCKET




2 PANE POCKET

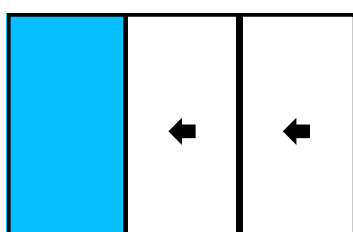


2 PANE POCKET

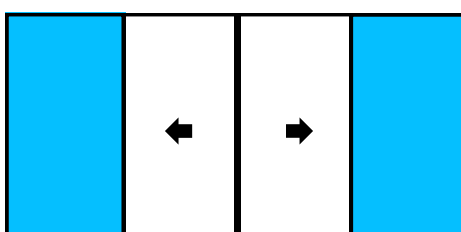


3 PANE POCKET

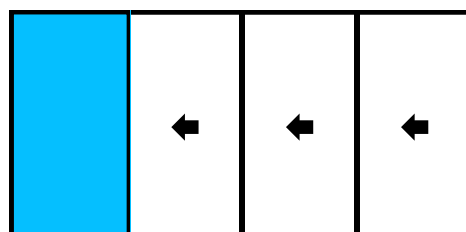

CORNER DOOR  
MOVABLE CORNER POST OR  
FRAMELESS BONDED CORNER

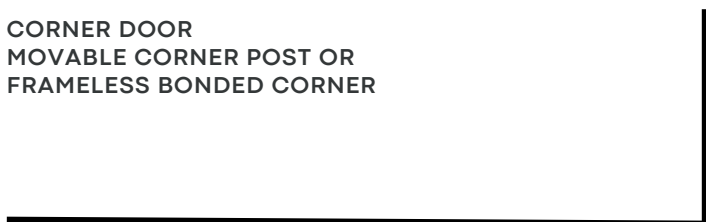


U SHAPE DOOR  
MOVABLE CORNER POST OR  
FRAMELESS BONDED CORNER

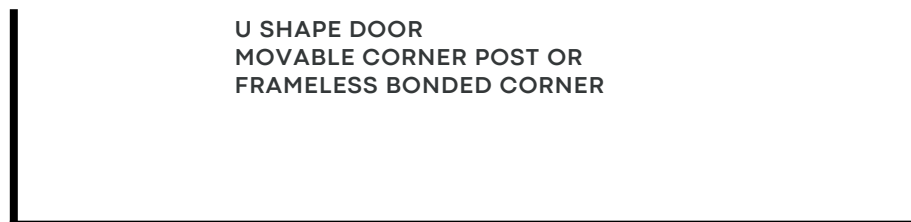


# CONFIGURATIONS




HIDDEN TRACK SOLUTION

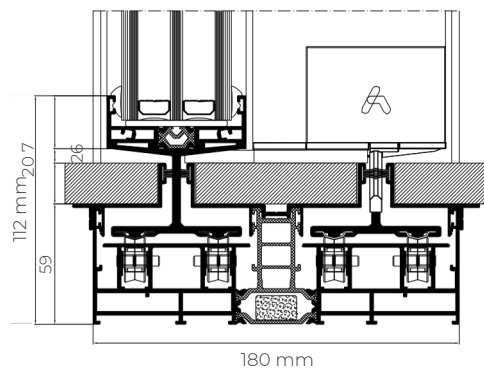

BESPOKE DRAINAGE SOLUTION

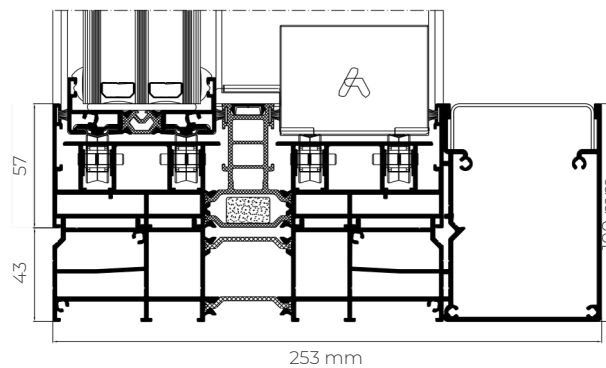


INTERLOCK HANDLE

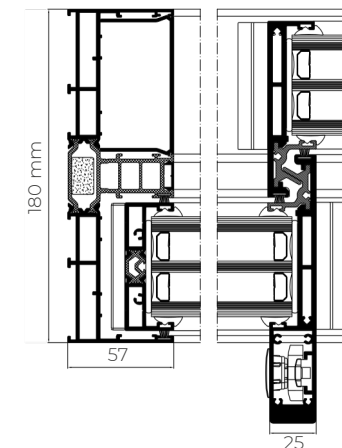

Available with manual (up to 400 kg) or motorized (up to 700 kg) opening system. Additionally, possibility of hiding the rail and even integrating it fully into the floor.

- High thermal & acoustic performance
- Up to 4 by 4 m per panel
- Motorized version
- 25 mm interlock
- Hidden track possibility

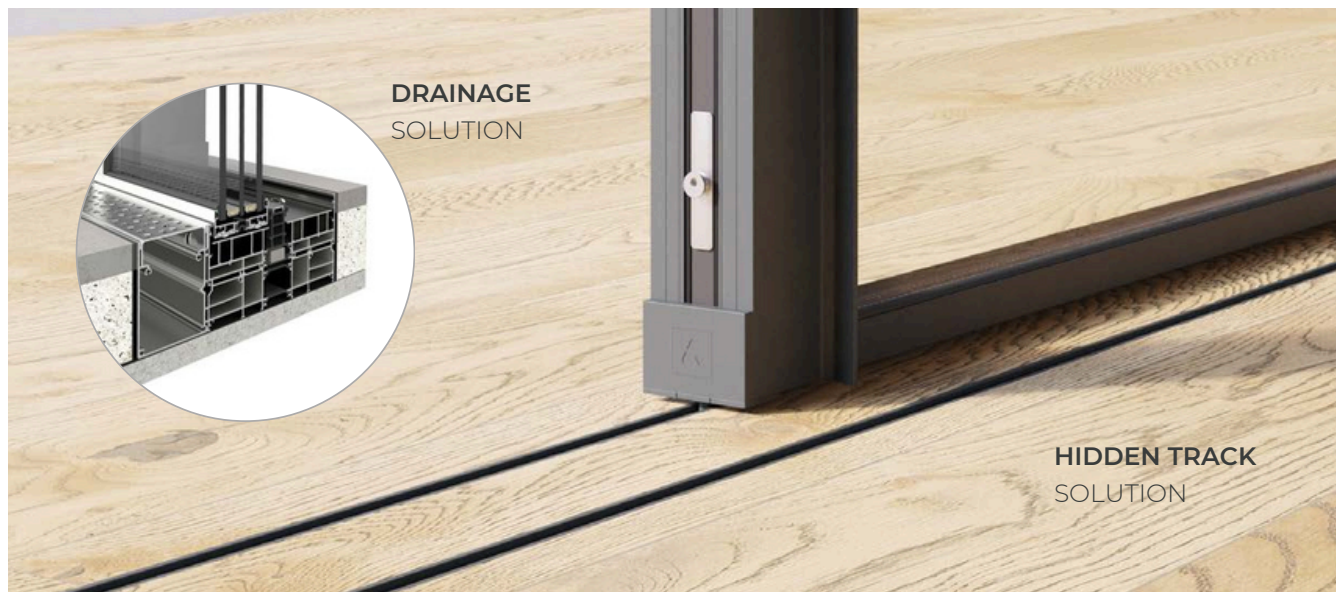

# HARDWARE



**GREY** 7016   **BLACK** 9005   **WHITE** 9016   **LIGHT SILVER**   **DARK SILVER**   **CUSTOM RAL**

Thermally broken minimalist sliding system that provides maximum luminosity with a minimal aluminium interlock profile. It has an elegant design only 20 mm sightline and offers the possibility of an inlaid closing system and of hiding the frame along the perimeter.


Possibility of locking system in the interlock, thus allowing the concealment of the sashes in the frame from a frontal view. Possibility of embedded locking system which facilitates the sashes crossing.



**INTERLOCK HANDLE**



**SECURITY  
HARDWARE**

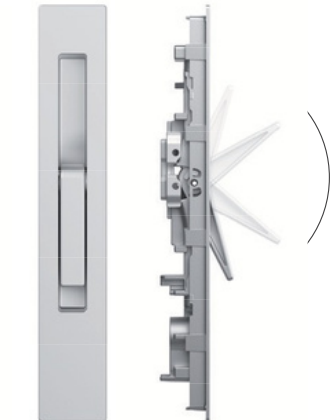


**FLUSH SECURITY  
HARDWARE**





# GLIDELINE GO

KEEP UP TO DATE WITH YOUR  
GLAZING PROJECTS WITH  
GLIDELINE GO

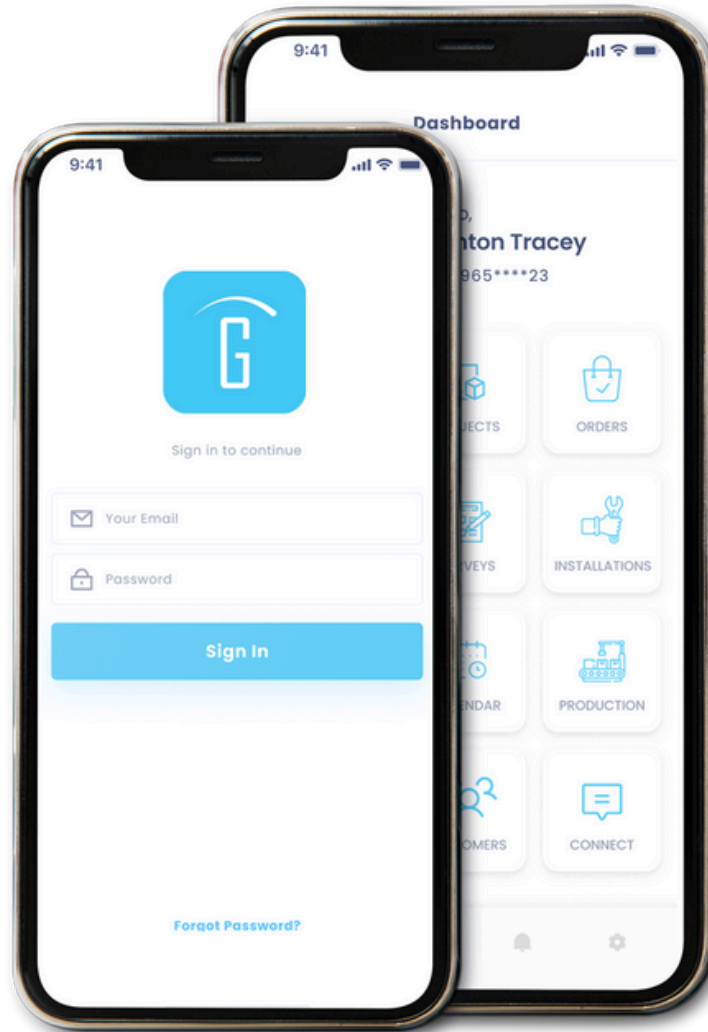

**Introducing GlidelineGO** – the ultimate system designed to streamline your glazing order management process. With GlidelineGO, customers and trade partners can effortlessly create, track, and manage orders, while enjoying the convenience of approving drawings and making payments directly within the app.

Efficiency and ease-of-use are at the heart of GlidelineGO. Whether you're an architect, contractor, or glazing professional, this powerful app empowers you to take control of your glazing projects, ensuring a seamless experience from start to finish.







# GLIDELINE